
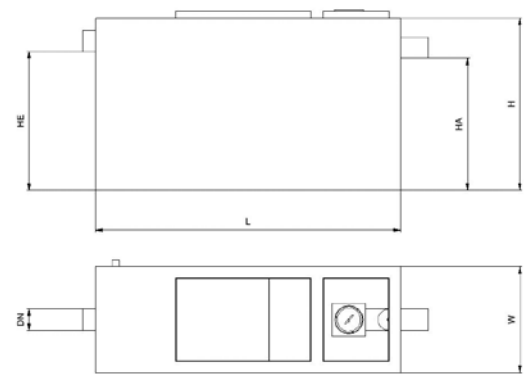


AQUAFIX® - SKk Separator de hidrocarburi cu filtru coalescent si decantor de namol

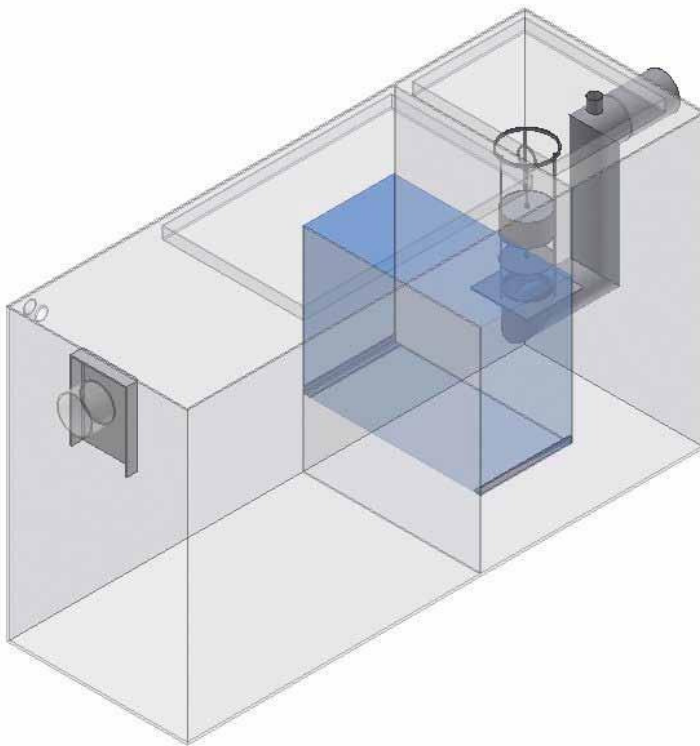

Lun- gime mm	Lati- me mm	Inalti- me mm	Debit max. l/s	Ø Sepe- rator mm	Capa- citate decan- tor l	Capa- citate sepa- rator l	DN intr./ intra- iesire mm	HE intra- re mm	H iesire mm	HA vizitare mm	Gura de vizitare mari- mea 1	Gura de vizitare mari- mea 2	Greu- tate mm	Capa- citate stocare l	Articol Nr.
--------------------	-------------------	---------------------	----------------------	------------------------	---------------------------------------	--	--	--------------------------	-------------------	----------------------	---------------------------------------	---------------------------------------	---------------------	---------------------------------	----------------

SKk 01,5/0150	1200	600	800	1	-	157	261	100	600	560	1	1	291,0	90	87601
SKk 03/0300	1400	600	1000	3	-	328	328	100	800	750	2	-	363,0	84	87603
SKk 04/0400	1400	800	1000	4	-	406	468	100	800	750	-	1	427,0	120	87604
SKk 06/0600	1800	800	1200	6	-	626	699	150	950	900	-	1	623,0	152	87606
SKk 08/0800	2000	800	1200	8	-	810	662	150	950	900	-	1	699,0	144	87608
SKk 10/1000	2100	800	1300	10	-	1061	734	150	1050	1000	-	1	809,0	144	87610
SKk 15/1500	2300	1100	1600	15	-	1690	1408	200	1300	1250	-	3	1275,0	220	87615
SKk 20/2000	2300	1100	1600	15	-	2253	1830	200	1300	1250	-	3	1371,0	286	87620

AQUAFIX® OTEL „G”

AQUAFIX® OTEL „K”

AQUAFIX® BETON

AQUAFIX® „10 PE”

AQUAFIX® „PP”

INSTRUCTIUNI
DE INSTALARE