
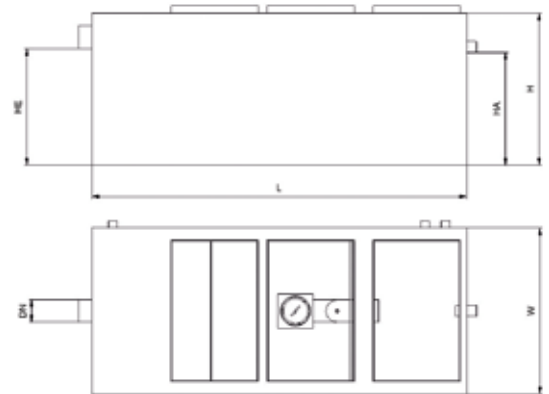


AQUAFIX® - SKmPk Separator de hidrocarburi cu filtru coalescent, decantor de namol si camera de pompare

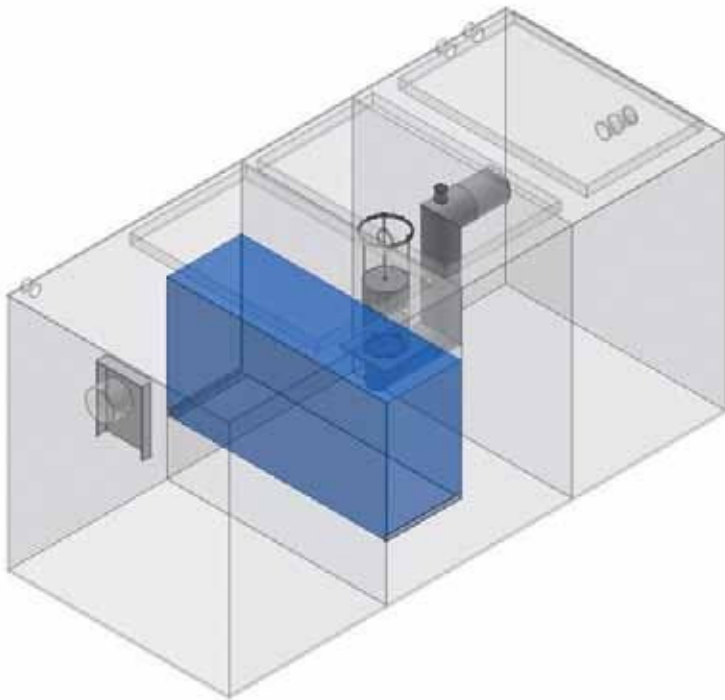

Lun- gime mm	Lati- me mm	Inalti- me mm	Debit ϕ max. l/s	Sepe- rator mm	Capa- citate decan- tor l	Capa- citate sepa- rator l	DN intr./ iesire mm	HE intra- re mm	H mm	HA mm	Gura de vizitare mari- mea 1	Gura de vizitare mari- mea 2	Greu- tate mm	Capa- citate stocare l	Articol Nr.
--------------------	-------------------	---------------------	-----------------------------	----------------------	---------------------------------------	--	------------------------------	--------------------------	---------	----------	---------------------------------------	---------------------------------------	---------------------	---------------------------------	----------------

SKmPk 01,5/0150	2200	600	800	1	-	157	296	100	600	570	3	-	396,0	102	87701
SKmPk 03/0300	1800	800	1000	3	-	312	437	100	800	770	3	-	492,0	112	87703
SKmPk 04/0400	2400	800	1000	4	-	406	562	100	800	770	3	-	574,0	144	87704
SKmPk 06/0600	2200	1100	1200	6	-	607	1012	150	950	920	-	2	950,0	220	87706
SKmPk 08/0800	2700	1200	1100	8	-	836	984	150	850	820	-	3	1111,0	240	87708
SKmPk 10/1000	2700	1200	1300	10	-	1040	1224	150	1050	1020	-	3	1220,0	240	87710
SKmPk 15/1500	3100	1200	1600	15	-	1536	1690	200	1300	1270	-	3	1633,0	264	87715
SKmPk 20/2000	3100	1400	1600	20	-	2253	1971	200	1300	1270	-	3	1766,0	308	87720

AQUAFIX® OTEL „G”

AQUAFIX® OTEL „K”

AQUAFIX® BETON

AQUAFIX® „10 PE”

AQUAFIX® „PP”

INSTRUCTIUNI
DE INSTALARE